

Extended Pallet Truck



Streamlining material transport with ease, electric trucks offer consistency and control and can be used across a range of industries, adaptable to different warehouse or logistical setups.

- **Weighing Capability & Thermal Printer Functionality:** Tech feature allows users to weigh loads directly without needing a scale and the option to print weight or load info immediately after weighing. Features a thermal printer that doesn't require color band replacement for added convenience.
- **Streamlined Interface with Enhanced Readability:** User-friendly and straightforward operational interface. Features a 6-digit LCD display angled for easy reading by operators. Offers 0.1% maximum error value and 0.5kg weighing accuracy.
- **Unit Flexibility:** Incorporates five intuitive buttons for effortless operation and simplified functionality. Effortlessly toggles weighing units (kg/lb) to meet diverse market requirements.
- **Smart Backlighting:** Automatic backlight activation upon weight changes for operator convenience. Backlight switches off after weight stabilization to conserve energy.
- **Robust Protection & Enhanced Connectivity:** Iron plate shielding safeguards the instrument from operational bumps and damage. Totally enclosed rear with aviation connector/RS232 connector for improved instrument protection.
- **Long-lasting Power:** Powered by a 4.8V/4AH lithium battery for over 60 hours of continuous use, 300 hours on standby, with a quick 5-hour recharge.

For more information, please visit: www.linconson.com

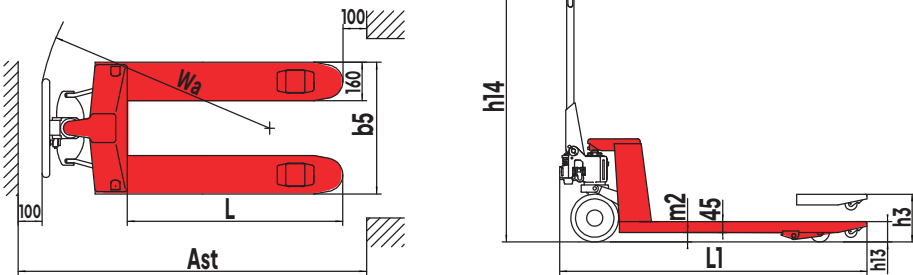


Figure 1.

Manual Pallet Truck

Model LI-HPTE



Smooth Transit, Seamless Control
Pallet Trucks by Linconson Industries

Model		LI-HPTE	
Capacity		2500/ 3000 (kg) 5511.6/ 6613.9 (lb)	2500/ 3000 kg 5511.6/ 6613.9 (lb)
Lowered fork height	h13	85 (mm) 3.3 (in)	75 (mm) 3 (in)
Steering wheel		Φ200 (mm) Φ7.9 (in)	Φ180 (mm) Φ 7.1 (in)
Fork wheel single		Φ80 x 93 (mm) Φ3.1 x 3.7 (in)	Φ74 x 93 (mm) Φ2.9 x 3.7 (in)
Fork wheel tandem		Φ80 x 70 (mm) Φ3.1 x 2.8 (in)	Φ74 x 70 (mm) Φ2.9 x 2.8 (in)
Max. lift height	h3	200 (mm) 7.9 (in)	190 (mm) 7.5 (in)
Total height	h14	1224 (mm) 4 ft 0.2 in	1214 (mm) 3 ft 11.8 in
Overall length	L1	1483/1533/1603 (mm) 4 ft 10.4 in/ 5 ft 0.4 in/ 5 ft 3.1 in	1483/1533/1603 (mm) 4 ft 10.4 in/ 5 ft 0.4 in/ 5 ft 3.1 in
Fork length	L	1100/1150/1220 (mm) 3 ft 7.3 in/ 3 ft 9.3 in/ 4 ft	1100/1150/1220 (mm) 3 ft 7.3/ 3 ft 9.3 in/ 4 ft
Width overall forks	b5	520/ 550/ 685 (mm) 1 ft 8.5 in/ 1 ft 9.7 in/ 2 ft 3 in	520/ 550/ 685 (mm) 1 ft 8.5 in/ 1 ft 9.7 in/ 2 ft 3 in
Ground clearance, centre of wheelbase	m2	40 (mm) 1.6 (in)	30 (mm) 1.2 (in)
Aisle width for pallets 1000x1200 crossways	Ast	1683/1733/1803 (mm) 5ft 6.3 in/ 5 ft 8.2 in/ 5 ft 11 in	1683/1733/1803 (mm) 5ft 6.3 in/ 5 ft 8.2 in/ 5 ft 11 in
Aisle width for pallets 800x1200 lengthways	Ast	1783/1783/1803 (mm) 5 ft 10.2 in/ 5 ft 10.2 in/ 5 ft 11 in	1783/1783/1803 (mm) 5 ft 10.2 in/ 5 ft 10.2 in/ 5 ft 11 in
Turning radius	Wa	1216/1266/1336 (mm) 3 ft 11.9 in/ 4 ft 1.8 in/ 4 ft 4.6 in	1216/1266/1336 (mm) 3 ft 11.9 in/ 4 ft 1.8 in/ 4 ft 4.6 in
Service weight		60 – 75 (kg) 132.3 – 165.3 (lb)	60 – 75 (kg) 132.3 – 165.3 (lb)

*Refer to Figure 1. for additional info for abbreviation references (eg. h14).



Adjustable Straight
Tappet



Additional Entry
and Exit Roller



Adjustable Pump
Cap